

PROFESSIONAL WIRELESS HEADSET

- Compatible with most standard corded desk/office phones
- 2.4GHz ISM band
- Telephony or VoIP
- Up to 10m range (approx 33feet)
- Up to 20 hours talk time
- Approx 5 days standby time
- Charging time approx 2 hours
- Styles: headband, ear hook or optional neck band
- Headset with earhook only 18gms
- Power Supply: DC9v 500mA



The power of communication

DW 773 WIRELESS HEADSET

Comfortable and lightweight, the DW773 is an exciting wireless solution to replace corded headsets in call centres and offices for little more than the cost of a high end corded headset.




Headband wearing option



Optional remote Lifter

DL-570L

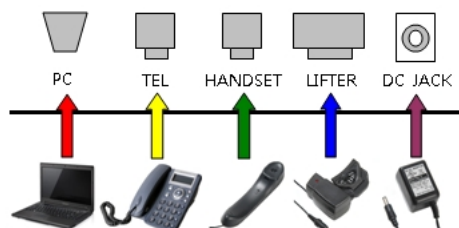

DW-773 TECHNICAL SPECIFICATIONS

Wireless technology

DW-773 includes a unique RF protocol optimized for two-way voice application. The protocol features an advanced agile frequency hopping scheme providing excellent co-existence performance with other 2.4 GHz systems such as Wi-Fi, Bluetooth and cordless phones. In addition the protocol uses a special dual frequency diversity technique to ensure good link quality without using an additional antenna.

Dw773 headset

Radio Frequency Range	2.4GHz ISM(Industrial, Scientific, Medical) Band
Radio Frequency Modulation	GFSK(Gaussian Frequency Shift Keying)
Radio Frequency Tx Power (Max)	0dBm(1mW)
Operating range	Up to 10 meter(Approx. 33 feet)
Talk time	Up to 20 hours
Standby time	Over 5 days
Battery type	Lithium Polymer
Charging time	Approximately 2 hours
Weight headset	25 g (0.88 oz) with battery without Steel Band(18g)
Weight base	232 g (8.18 oz)
Dimensions	(L x W x H) 144 x 33 x 24 mm (5.67 x 1.29 x 0.94 inches) with boom
Microphone	Sensitivity:-42dB±3dB 0dB=1V/1Pa @ 1kHz 4ø Omni-directional microphone
Speaker	20ø speaker element; 100Ω; Frequency range :20Hz ~10kHz; Sensitivity:116dB±3dB @ 1kHz(input:100mV) Headset wearing style 3 different wearing styles.Earhook,headband and neckband
Operation temperature	0° to +60°C (32° to+140°F)
Storage temperature	-40° to +85°C (-40° to+185°F)
Waterproof	No
Rain shower proof	No
AC power supply	230 / 110VAC 9VDC 500mA AC-DC adaptor
Features	End button, Mute button

DW773 base

Compatibility	Compatible with most standard corded desk phones
Radio Frequency Range	2.4GHz ISM(Industrial, Scientific, Medical) Band
Radio Frequency Modulation	GFSK(Gaussian Frequency Shift Keying)
Radio Frequency Tx Power (Max)	0dBm(1mW)
Operating range	Up to 10 meter(Approx. 33 feet)
Weight	255 g (8.99 oz)
Dimensions	(L x W x H) 148 x 117 x 103 mm (5.8 x 4.6 x 4 inches)
Operation temperature	0° to +60°C (32° to+140°F)

What's in the package	DW773 headset,Dw773 base(interface to office phones/headset interface),power adaptor,Connection cord:Deskphone-to -base,Headband,Ear-Hook,Earcushion, Battery pack,User manuals
-----------------------	---

Package information

Weight of product packed in unit box	0.980Kg
Unit standard box dimensions	H128 x W202 x L202mm
Weight of Master box/number of products	ca. 12.5kg / 12
Master box dimensions	H280 x W445 x L630mm

.....